

rolled edges

Practical




DOVE GREY ACTIVECOAT®
The new hard wearing, anti-bacterial powder coating exclusively from Probe, developed in conjunction with DUPONT.

SHELVES

Both Commercial and British Standard shelves are available in many widths and depths for maximum flexibility.

SLIM VERTICAL EDGE

This, slim, rolled edge allows maximum shelf width to be used while adding strength to this system.



maximum bay loading 500kg
dependent on specification

pictured: single bay

ROLLED EDGE UPRIGHTS


Available in three heights 75", 87" & 99" and four depths 12", 15", 18" & 24".
Note: 99" not available in 24" depth.

3 HEIGHT OPTIONS
75" 87" and 99" uprights in a choice of depths.

4 SHELF DEPTHS & 6 WIDTHS
A wide range of shelf options have been made available to suit your needs. Not all depths are available with all widths, see price guide for a comprehensive list.

SPECIAL USE SHELVES
See the next page for the full range of pull out and filing shelves.

DOOR & FRAME SETS
These convenient door sets allow an added security feature to this universal system. Available in 75" & 87" high and 36" wide.

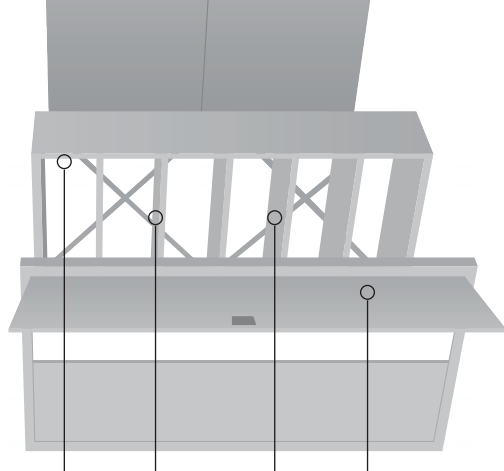

BAY DIMENSIONS

Height (inch)	Widths (inch)	Depths (inch)
75	Shelf 24"	12 15 18 24
	30"	
	36"	
87	1M	
	42"	
99	48"	

Individual fixed shelf loadings **90-205kgs UDL**
See price list for individual shelf loadings.

PULL OUT SHELVES

Height (mm)	Widths (mm)	Depths (mm)
75	Shelf 15"	18"
	36"	
	99	

Individual shelf loading of 40kgs UDL.

PULL OUT FILE CRADLE


Height (mm)	Widths (mm)	Depths (mm)
75	Shelf 15"	18"
	36"	
	99	

Individual cradle loading of 40kgs UDL.

LATERAL FILING FRAME

Height (mm)	Widths (mm)	Depths (mm)
75	Shelf 15"	18"
	36"	
	99	

Individual filing frame loading of 40kgs UDL.



SLIM VERTICAL EDGE

Slim Vertical Edge rolled for added strength and style. Pictured with optional Decor End Panels to finish off bay ends neatly.



SHELF ADJUSTMENT

Shelves can be raised or lowered by 1" (25.4mm) increments making this system extremely versatile.

SHELF CLIPS


Shelves may be seated on clips for ease of adjustment but maximum shelf loading is reduced. Specific shelves still need to be bolted, refer to technical department for specification.

bay bracing requirements
maximum bay loading 500kg
dependent on specification

BAYS AERIAL VIEW

WITHOUT CLADDING

Denotes position of bracing

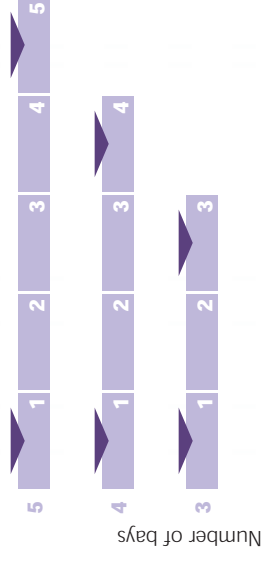

Number of bays

BAY REAR VIEW



ROLLED EDGE
CONTINUED

□ This system does not need bracing if fully clad.